


TECHO—BLOC

GRAPHIX FREESTANDING WALL

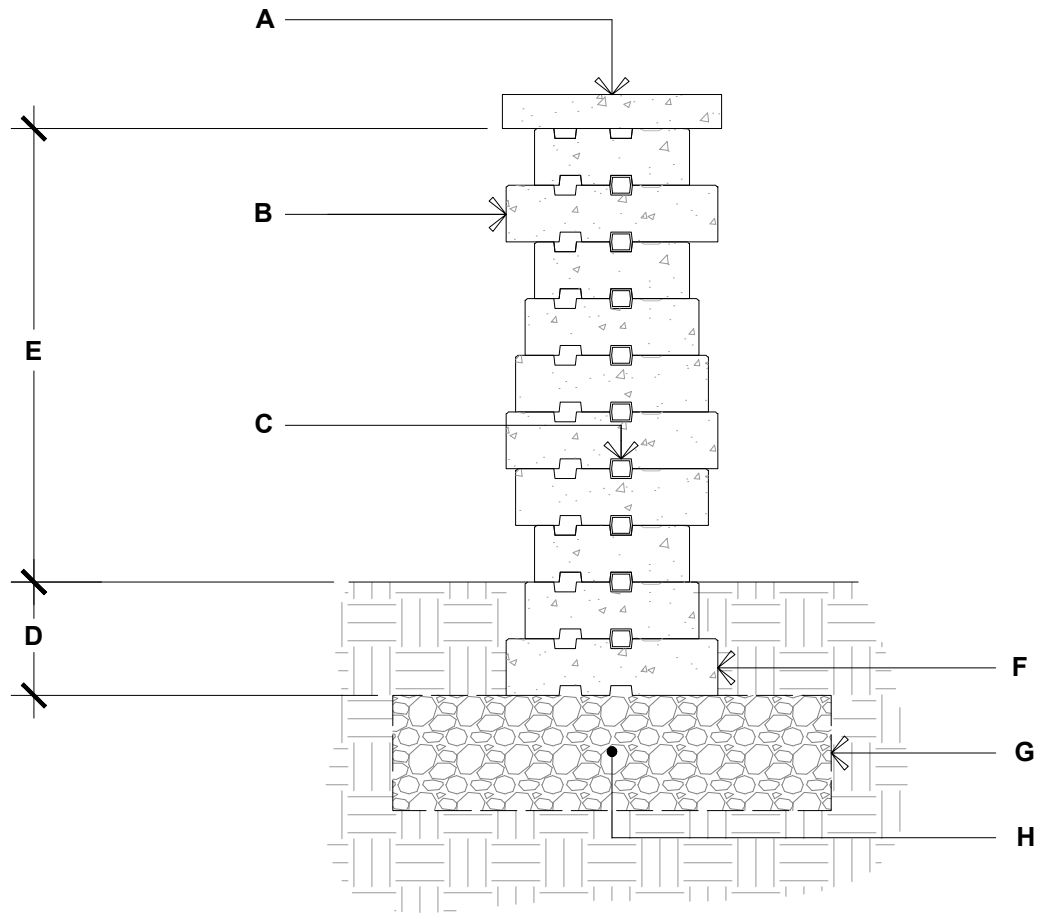

A. TECHO-BLOC CAP UNIT SECURED TO UNIT BELOW WITH CONCRETE ADHESIVE

B. GRAPHIX DOUBLE-SIDED WALL UNITS SECURE EACH ROW WITH CONCRETE
ADHESIVE

C. CONNECTOR

D. EMBEDMENT DEPTH, 6" (150 mm) MIN.

E. 23 1/2" (600 mm) MAX.

F. FOR THE FIRST ROW, ALWAYS USE THE DEEPER GRAPHIX BLOCK

G. GEOTEXTILE

H. COMPACTED GRANULAR LEVELING PAD, 6" (150 mm) THICK MIN. THICKNESS
ACCORDING TO PROJECT SPECIFIC CONDITIONS