


TECHO—BLOC

PAVERS PAVERS WITH ASPHALT TRANSITION HEAVY TRAFFIC

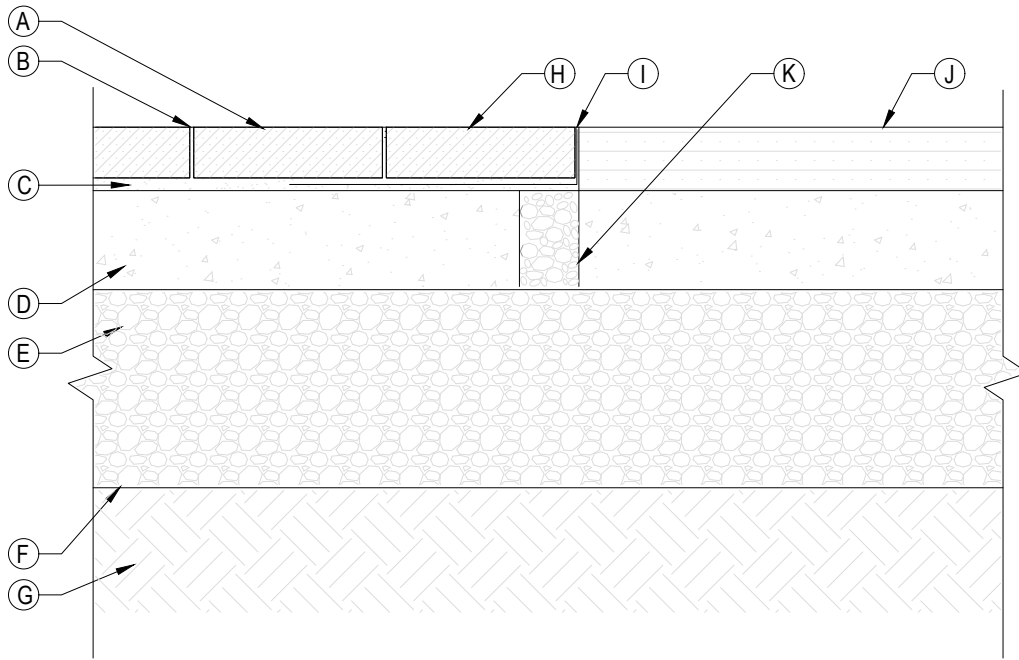

SECTION

- A TECHO-BLOC PRECAST CONCRETE PAVER 3 15/16" (100 mm) THICK CONFORMING TO ASTM C 936
- B STABILIZED SAND JOINT FILL CONFORMING TO ASTM C 144
- C SETTING BED (GRANITIC SAND) 1" (25 mm) THICK CONFORMING TO ASTM C 33
- D STABILIZED BASE (ASPHALT TREATED BASE), THICKNESS AS SPECIFIED ON DRAWINGS AND SPECIFICATIONS 12" TO 24" (300 TO 600 mm) UNDER ASPHALT PAVEMENT
- E GRANULAR BASE, THICKNESS AS SPECIFIED ON DRAWINGS AND SPECIFICATIONS
- F GEOTEXTILE
- G NATURAL SOIL OR COMPACTED BACKFILL
- H GEOTEXTILE 12" (300 mm) WIDE
- I SAW-CUT PAVEMENT (STRAIGHT LINEAR JOINT) AND SEAL JOINT
- J ASPHALT PAVEMENT
- K DRAINAGE HOLE AT LOWEST ELEVATION, 3" (75 mm) DIA. FILL WITH FREE DRAINING AGGREGATE 1/2" (10 mm) AND COVER WITH GEOTEXTILE