


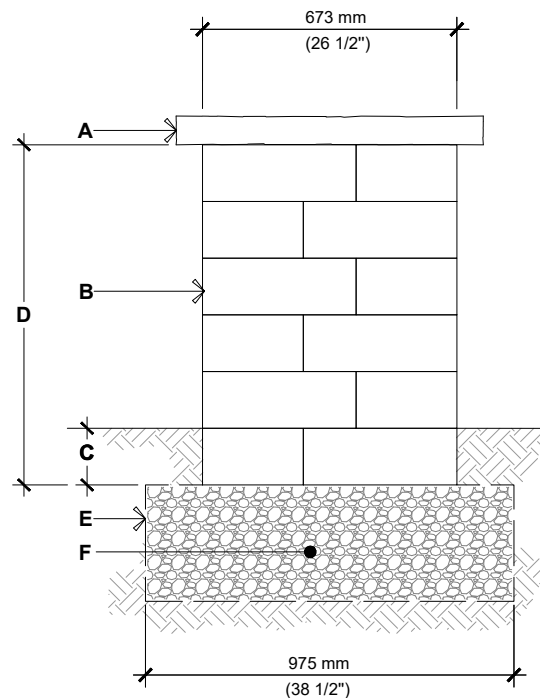

SEMMA

- A. PILLAR CAP UNIT (SECURE WITH CONCRETE ADHESIVE)
- B. SEMMA RAW PILLAR UNIT SECURE EACH ROW WITH CONCRETE ADHESIVE
- C. EMBEDMENT DEPTH: 6" (150 mm) MIN.
- D. 35 7/16" (917 mm), HEIGHT PER PALLET
47 1/4" (1067 mm) MAXIMUM HEIGHT
- F. GEOTEXTILE
- G. COMPACTED GRANULAR BASE 6" (150 mm) THICK MIN. THICKNESS ACCORDING TO PROJECT SPECIFIC CONDITIONS